


Legal Information

Copyright © 2017 ZTE CORPORATION
All rights reserved.

No part of this publication may be excerpted, reproduced, translated or utilized in any form or by any means, electronic or mechanical, including ZTE CORPORATION. The manual is published by ZTE CORPORATION. We reserve the right to notice. The information on the package is only for your reference. Images are for your reference only. Please check the product model before purchasing.

Getting to Know Your Phone

Phone Overview

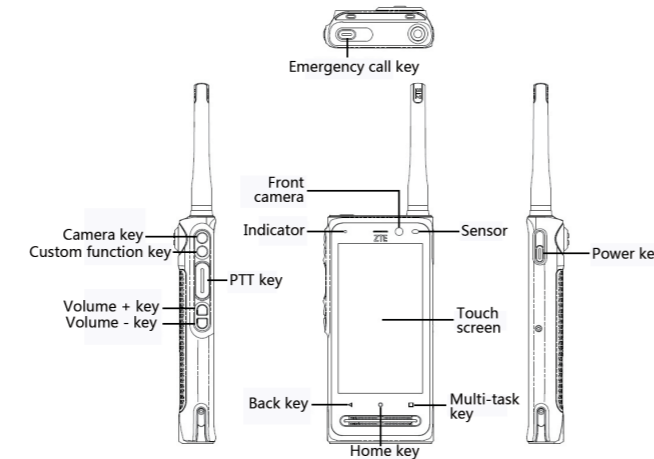

Button Description

No.	Name	Function
1	Home key	In any interface, press the Home key to return to the standby interface.
2	Power key	<ul style="list-style-type: none"> Press for seconds to phone mode menu. You can turn off the phone, restart the phone, turn on or off the airplane mode. Press to switch your phone to Sleep mode.
3	Back key	Return to the previous interface.
4	Menu key	Enter the menu of the corresponding interface.
5	Multi-task key	Press to show up the latest running application.
6	Emergency call key	This key function is not supported by eChat APP.
7	Camera key	<ul style="list-style-type: none"> In non-camera interface, long press to open the camera. In camera interface, short press to shoot a picture.
8	PTT key	<ul style="list-style-type: none"> When the terminal is in idle mode, you can press the PTT key to originate a PTT call. When the terminal is being involved in a call, you can press the PTT key to request call right, or release the PTT key to release call right. This key function is dependent on the PTT client.

Basic Use

Power on/Power off

- To power on or power off the mobile phone, press and hold the **Power** key.
- After power-on, the mobile phone automatically detects whether the UIM/(U)SIM card is inserted or available, and then displays the following prompt in the screen: Boot password; password required if enabled.

Standby Mode

After the UIM/(U)SIM card and mobile phone are successfully unlocked, the mobile phone can automatically search for an available network. After an available network is searched, the mobile phone enters Standby mode, and then you can originate or answer calls.

In the Standby mode, you can perform any of the following operations:

- Press the **Dial** key to enter the call log list.
- Press the **OK** key to enter the main menu.
- Press and hold the **0** key to enter "+".
- Press and hold the * key to lock the keyboard.

Main Item

Icon	Description	Icon	Description
	Connected to the public 4G network.		Connected to the public 3G network.
	Connected to the public 2G network.		No public network SIM card is inserted.
	Private LTE network		No private network SIM card is inserted
	Signal strength		GPS Positioning
	SMS message		Alarm clock
	Wi-Fi connected		Bluetooth enabled
	USB connected		Mobile hotspot enabled
	Synchronizing data		Airplane mode
	Mute		Vibrate
	The Battery is fully charged.		The battery is running out.
	The battery is being charged.		The battery is low.
	Earphone inserted		DMO mode
	New Email		The storage space is fully occupied.

Common PTT Operations

What You Need

To use this function, you need:

- An eChat account.
- An Internet connection.

Originating a Full-Duplex Voice Private Call

- Enter the eChat APP, input a phone number or select a phone number from the **Contacts** and press the **Full-Duplex Dial** key to originate a full-duplex voice call.
- To terminate a call or cancel the dialing, press the **End** key.

Answering a Full-Duplex Voice Private Call

- To answer a voice call, press the **Dial** key.
- To terminate or reject a call, press the **End** key.

Originating a Half-Duplex Private Call

Enter the eChat APP, input a phone number or select a phone number from the **Contacts** and press the **Half-Duplex Dial** key to originate a full-duplex voice call.

Answering a Half-Duplex Private Call

- Half-Duplex Private call is answered automatically.
- To terminate a private call, press the **End** key.

Originating a Group Call

- Enter the eChat app, press the **PTT** key to originate a group call.
- The eChat client could not terminate the group call.

Setting The WorkGroup

Enter the eChat app, select a group and click **"Setting workgroup"** to set as workgroup.

Toxic or Hazardous Substances or Elements

Parts	Toxic or Hazardous Substances or Elements					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
LCD	○	○	○	○	○	○
Mainboard	×	○	○	○	○	○
Shell	○	○	○	○	○	○
Accessories	×	○	○	○	○	○

○: Indicates that the toxic or hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006.

×: Indicates that the toxic or hazardous substance contained in at least one of the homogeneous materials for this part is above the limit requirement in SJ/T11363-2006.

Notes:

- Information about the substances contained in the product manufactured by ZTE CORPORATION should be continuously updated with the technology development.
- × marked on this product indicates that there are currently no alternative technologies or components. The product manufactured by ZTE CORPORATION is in compliance with the "Administration on the Control of Pollution Caused by Electronic Information Products" published by People's Republic of China.
- ZTE CORPORATION reserves the final rights of explanation of the parts included in this table.

The symbol on the right side shows the Environment Friendly Use Period (EFUP) of this product. Some replaceable parts may have a different EFUP label attached to it, such as the battery unit. This EFUP is valid only under the operating conditions listed in the operation manual of the product.

